


GENERAL NOTES:
 A. EXPANSION JOINTS SHALL BE PLACED AT CORNERS, BC'S & EC'S, AND AT 40' MAX. SPACING.
 B. PCC PER SPECIFICATIONS.
 COMPACT 12" MIN. SUBGRADE SOILS TO 95% OF RELATIVE MAX. DENSITY.

A 6" CONC. CURB & 12" GUTTER
 SCALE: NTS

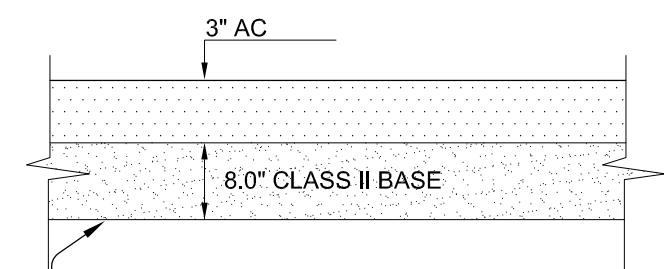


PAVEMENT AREAS TO BE SCARIFIED TO A DEPTH OF 12" BELOW EXISTING GRADE OR FINISHED GRADE. SOIL SHALL BE WETTED TO SLIGHTLY ABOVE OPTIMUM MOISTURE CONTENT AND COMPACTED TO MIN. OF 90% OF MAX DRY DENSITY. THE UPPER 6" OF SUBGRADE SHALL BE COMPACTED TO 95% RELATIVE DENSITY.
 THE MINIMUM STRUCTURAL SECTION AS SHOWN IS BASED ON THE R-VALUE OF THE NATIVE MATERIAL AND A MINIMUM TRAFFIC INDEX OF 5.0. THE ACTUAL STRUCTURAL SECTION SHALL BE BASED ON THE APPROVED PROJECT SOILS REPORT.

B A.C. PAVEMENT SECTION
 NO SCALE

Keith V. Crowe, P.E.
 Consulting Engineer

P.O. Box 832, Alascadero, CA 93423-0832
 Phone & Fax: (805) 464-0975
 KVCrowe@Charter.net



Project:

ACCESSIBILITY IMPROVEMENTS

ROLLING HILLS APARTMENTS

TEMPLETON, CA

Client:

Rolling Hills Housing Associates, LP

Sheet Contents:

CONSTRUCTION DETAILS

Date:

Aug 2010

Revised:

Job No:

Rolling Hills Apartments

Sheet:

C-4.0

of: